

Abstract: Thermochemical energy storage is the next step in creating a self-sustaining society because it allows for energy supply to meet the electricity demand. Chemical bonds provide much higher storage capacities than the conventional energy storage methods; renewable storage schemes with greater energy storage density will potentially have a faster path to economic viability.

A potential thermochemical storage cycle lies in the carbonation/decomposition of SrO/SrCO₃. It offers the prospect of capturing thermal energy and releasing it at temperatures above 1200°C. One of the fundamental aspects of the project depends on the amount of surface area of the physical structure. To obtain an optimal amount of surface area, the current project involves creating a matrix through the mixing of heat treated SrO and decomposition of sacrificial carbon. The temperatures at which the SrO is being heat treated varied along with the size of the particles being used; also the ratio and size of the carbon particles are being varied to find the optimal structure with the most surface area.

Objective: To find the variable/s that most affects the energy density. It is hypothesized that an optimized amount of surface area will maximize the energy density.

Procedure:

1. A matrix was created

Parameter	Level	Selected Values
A Heat treatment temperature (T _h)	-	1235 °C
	+	1400 °C
B SrO particle size (S)	-	25 µm -38 µm
	+	106 µm -125 µm
C Graphite particle size (S _g)	-	25 µm -38 µm
	+	106 µm -125 µm
D Mass ratio of graphite to SrO (r)	-	0.2
	+	0.7
E Structure formation temperature (T _s)	-	1100°C
	+	1300°C

2. Heat treat the SrO





3. Crush and sieve the materials to the appropriate sizes



4. Mix the SrO and graphite to the appropriate ratios




5. Evaluate the reactivity of the samples using a thermo gravimetric analyzer (TGA)

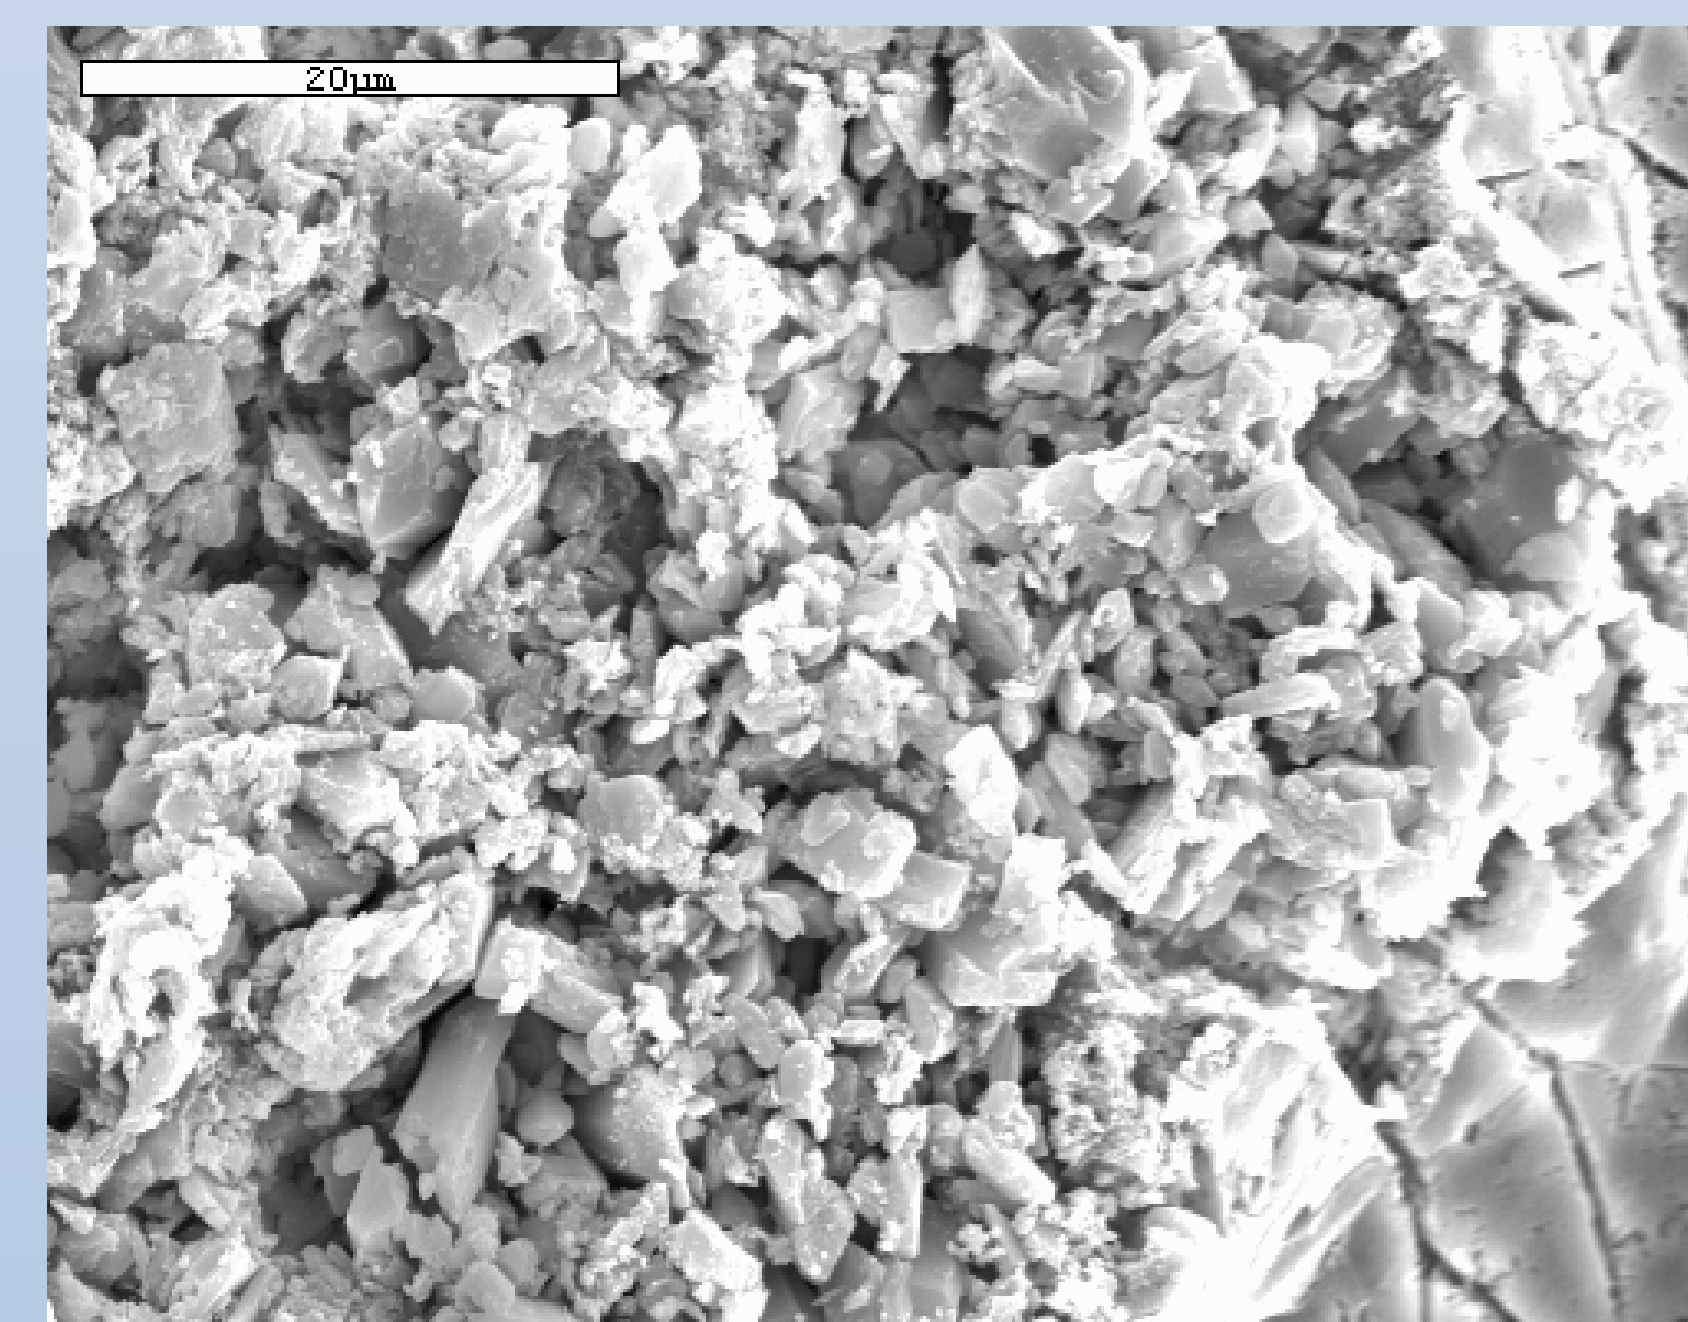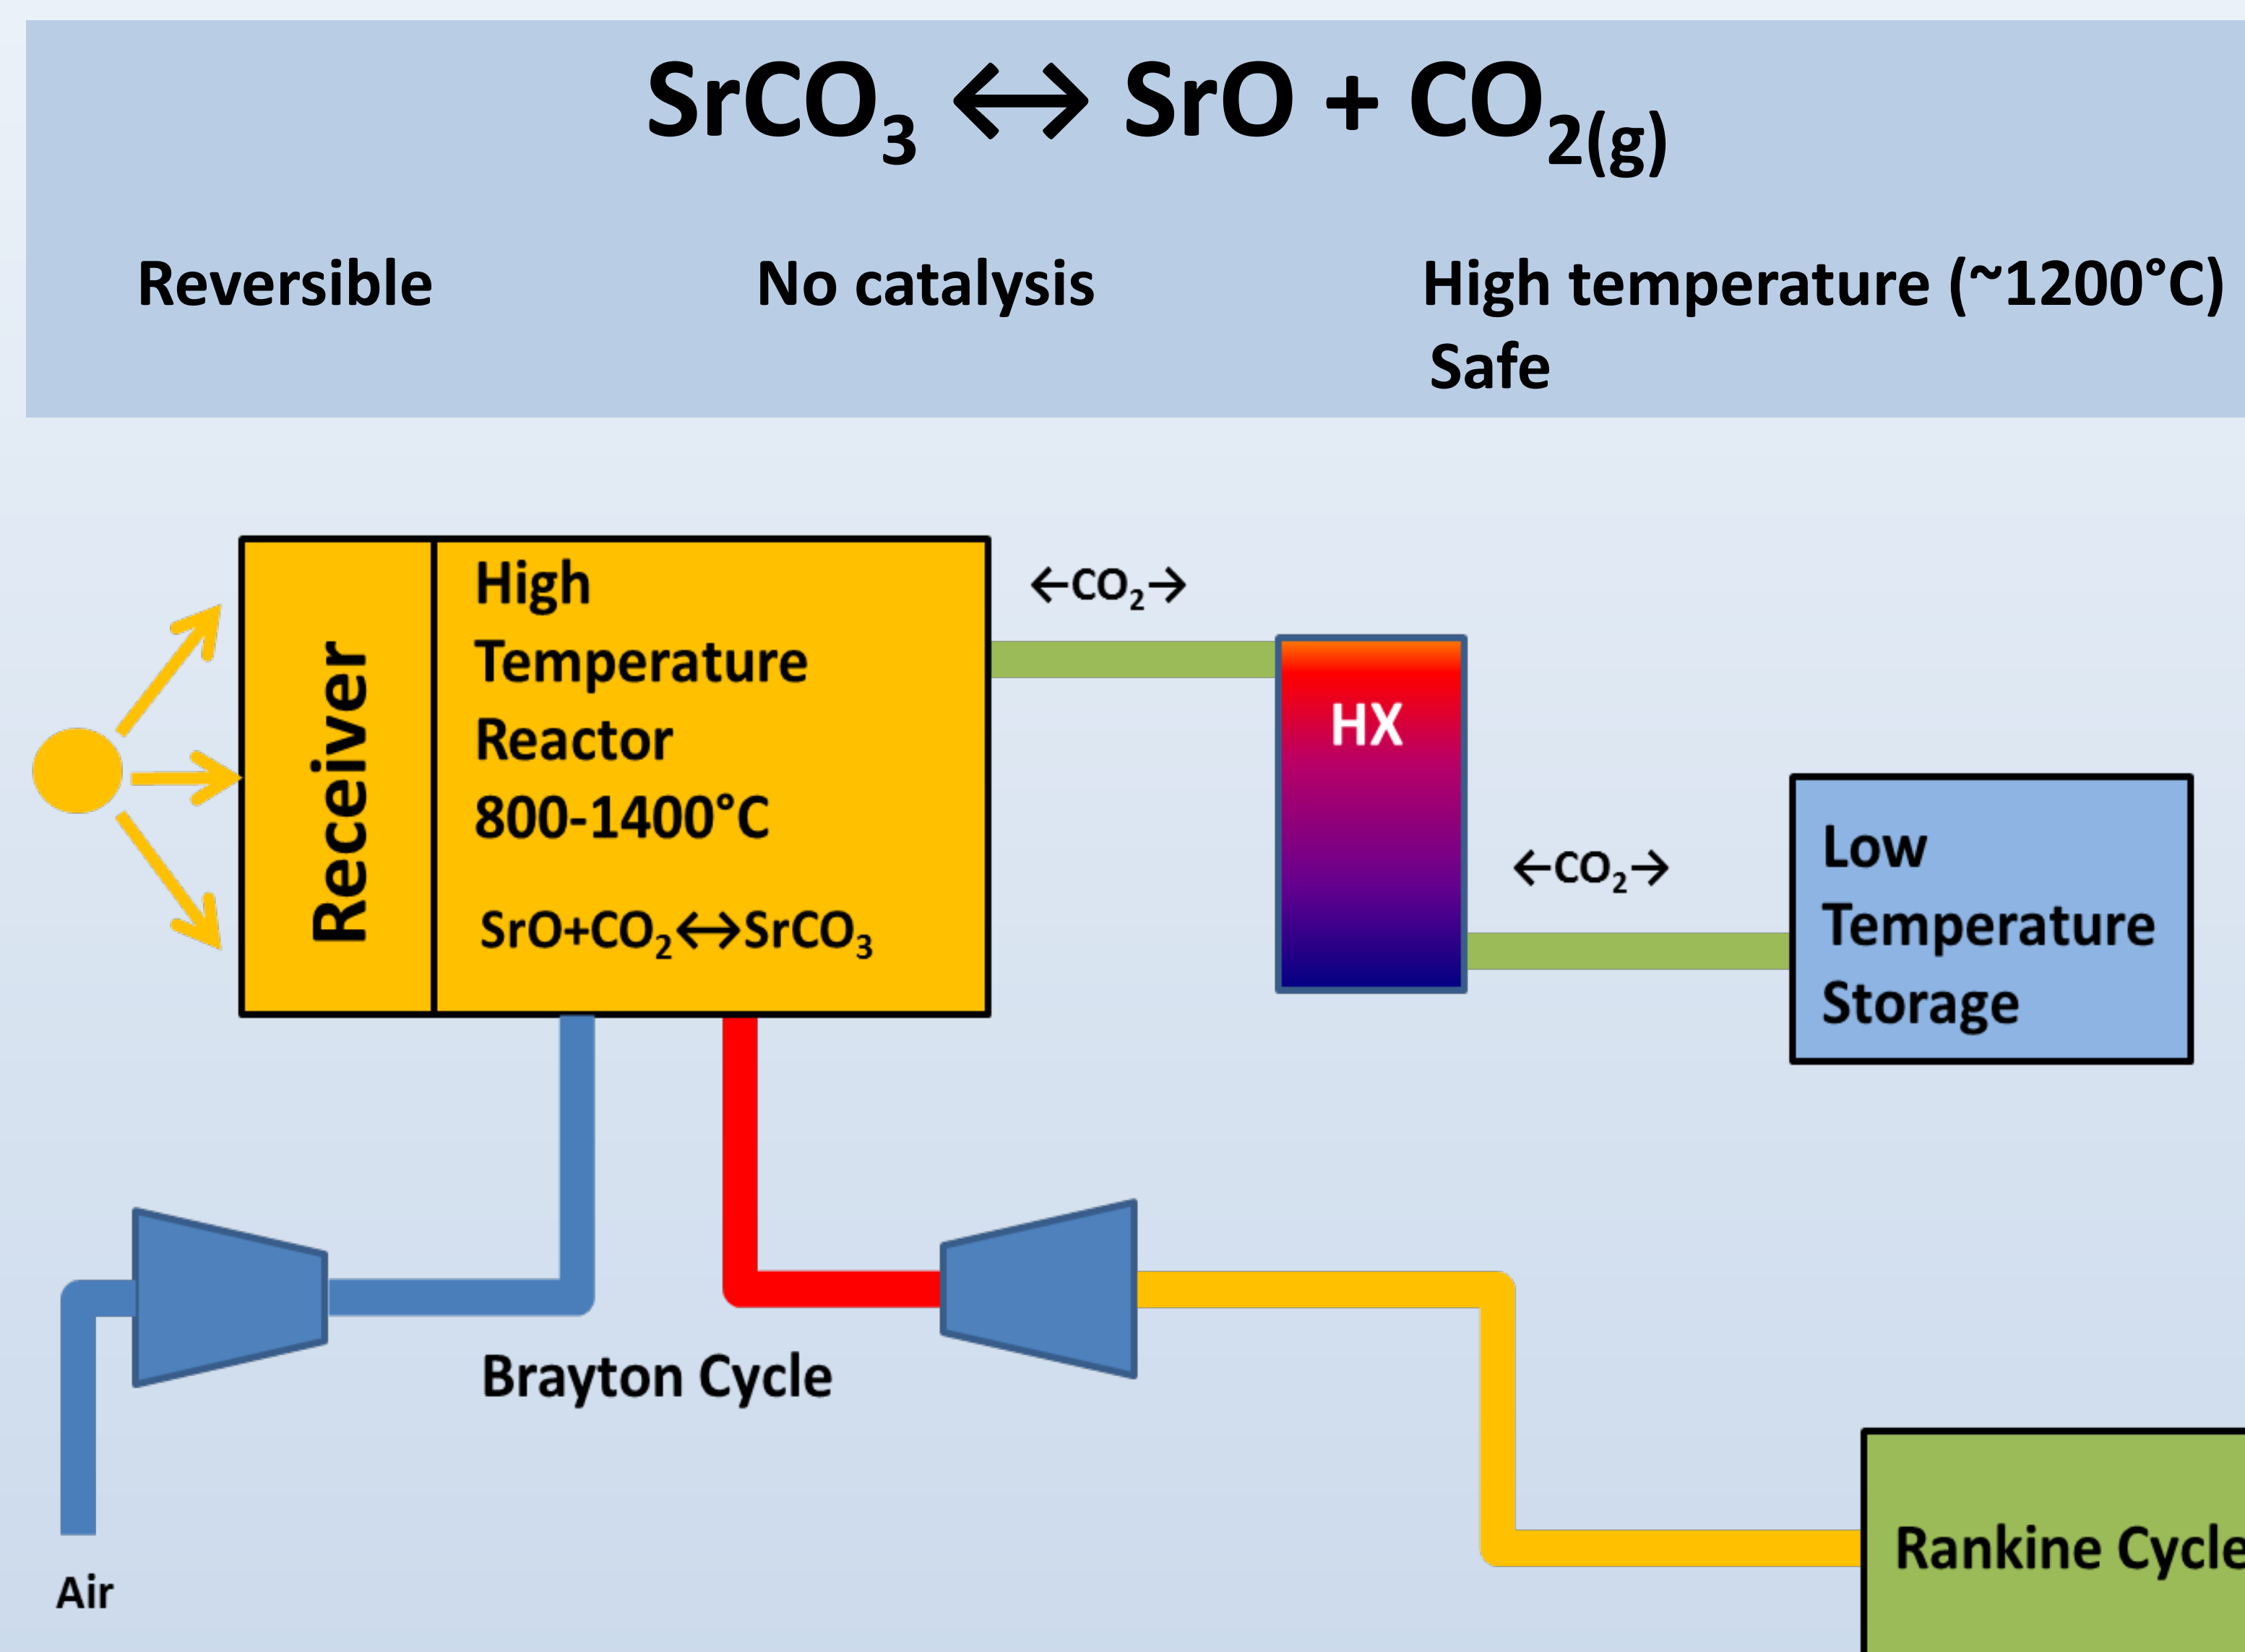



*SEM image of porous SrO/SrCO₃ sample 8.

Energy Density of Samples

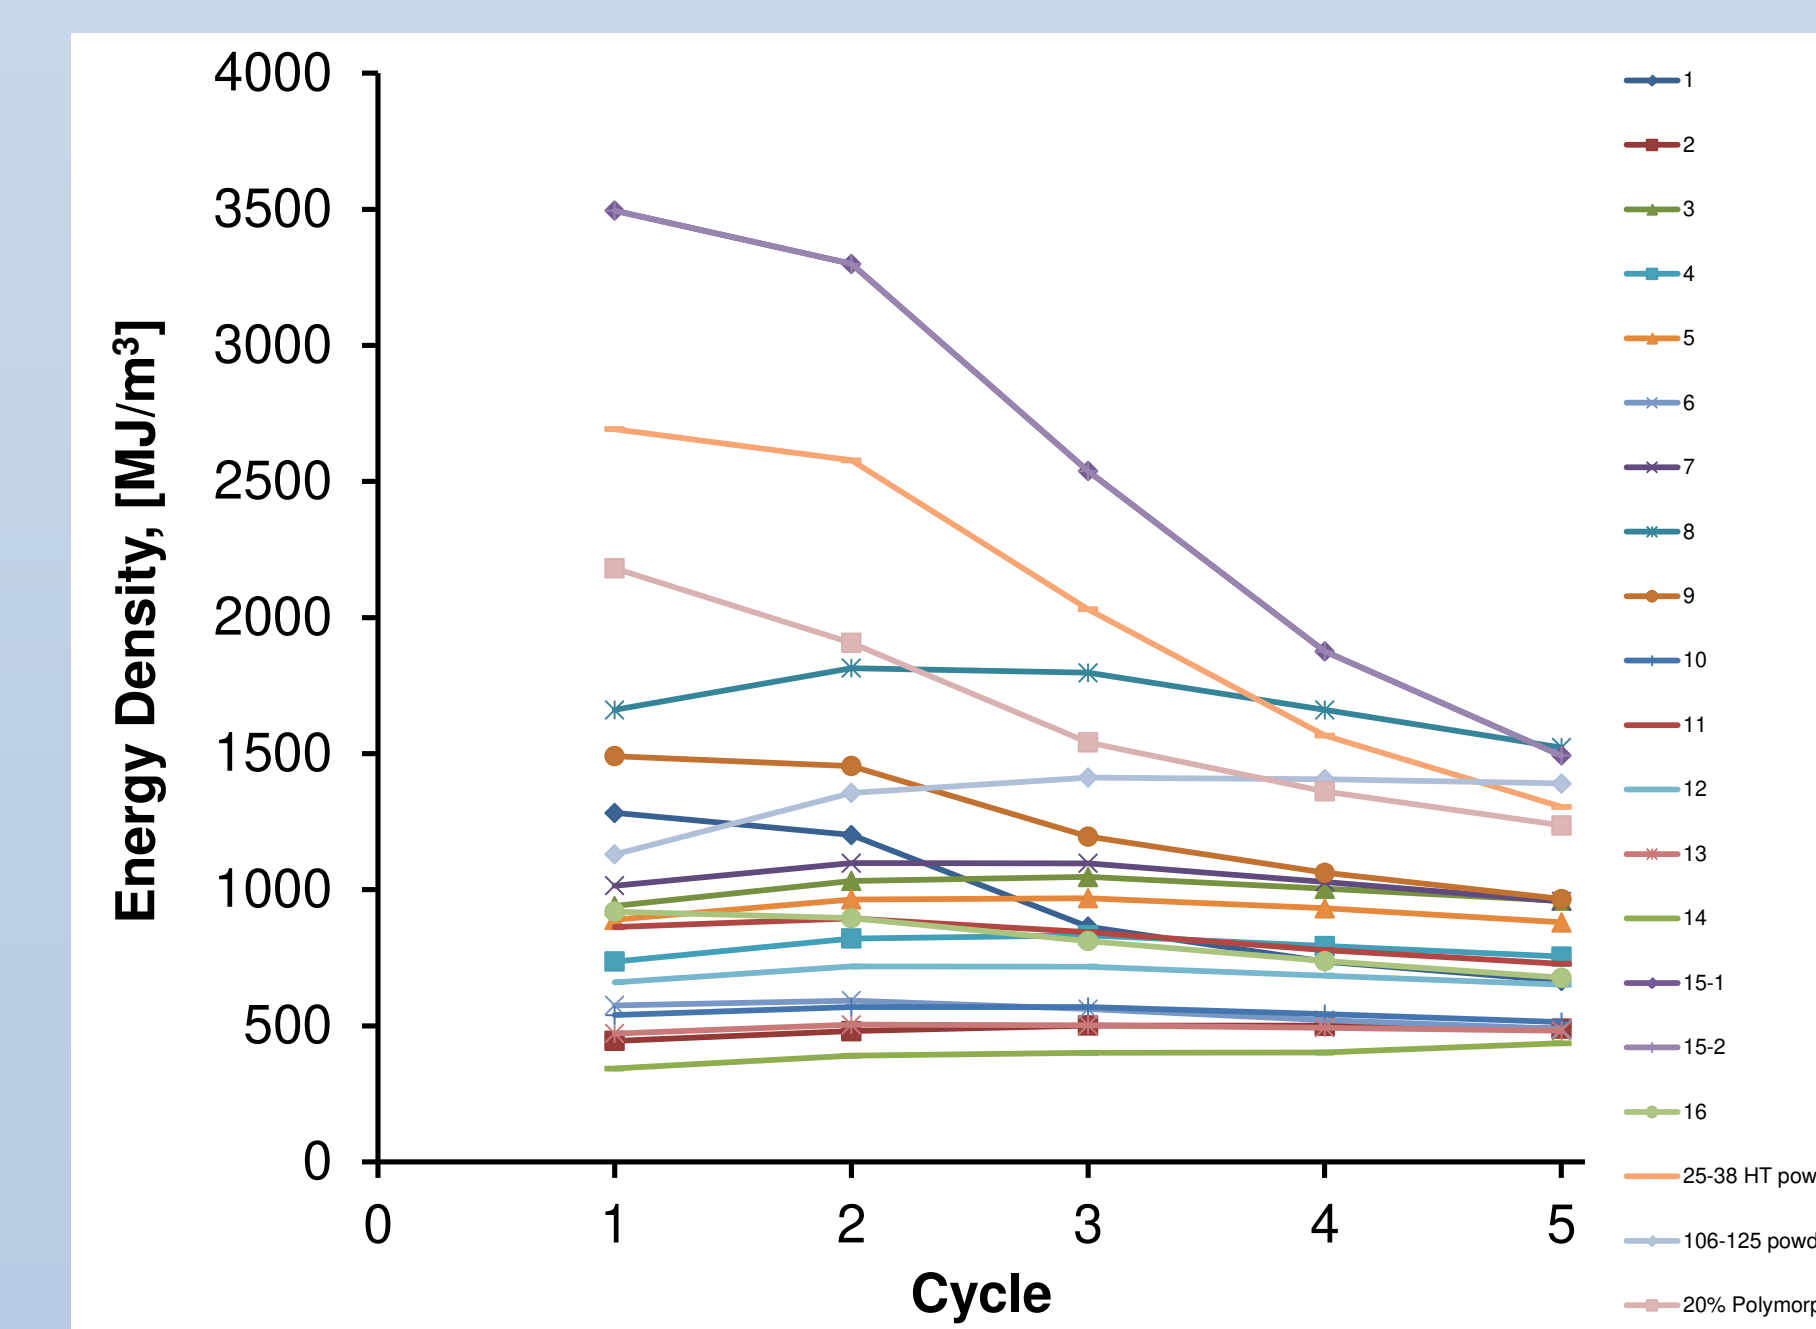


Future Work

Investigation into carbonation at elevated pressure

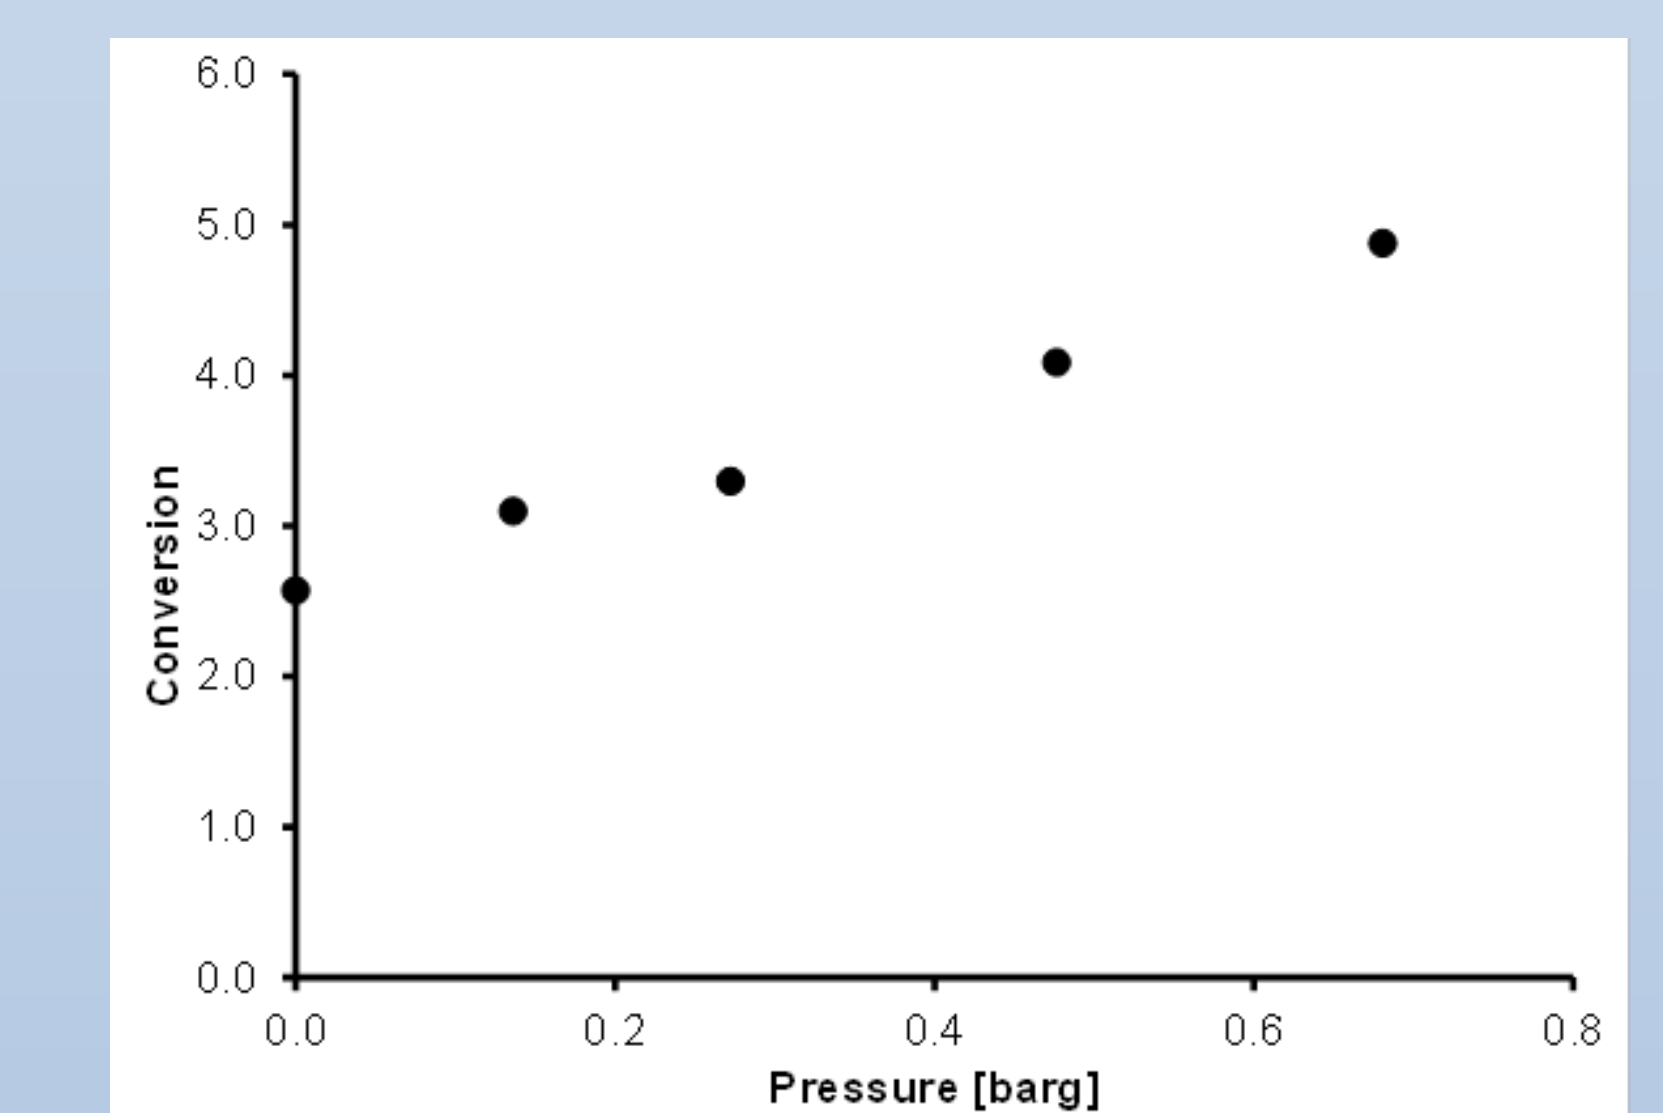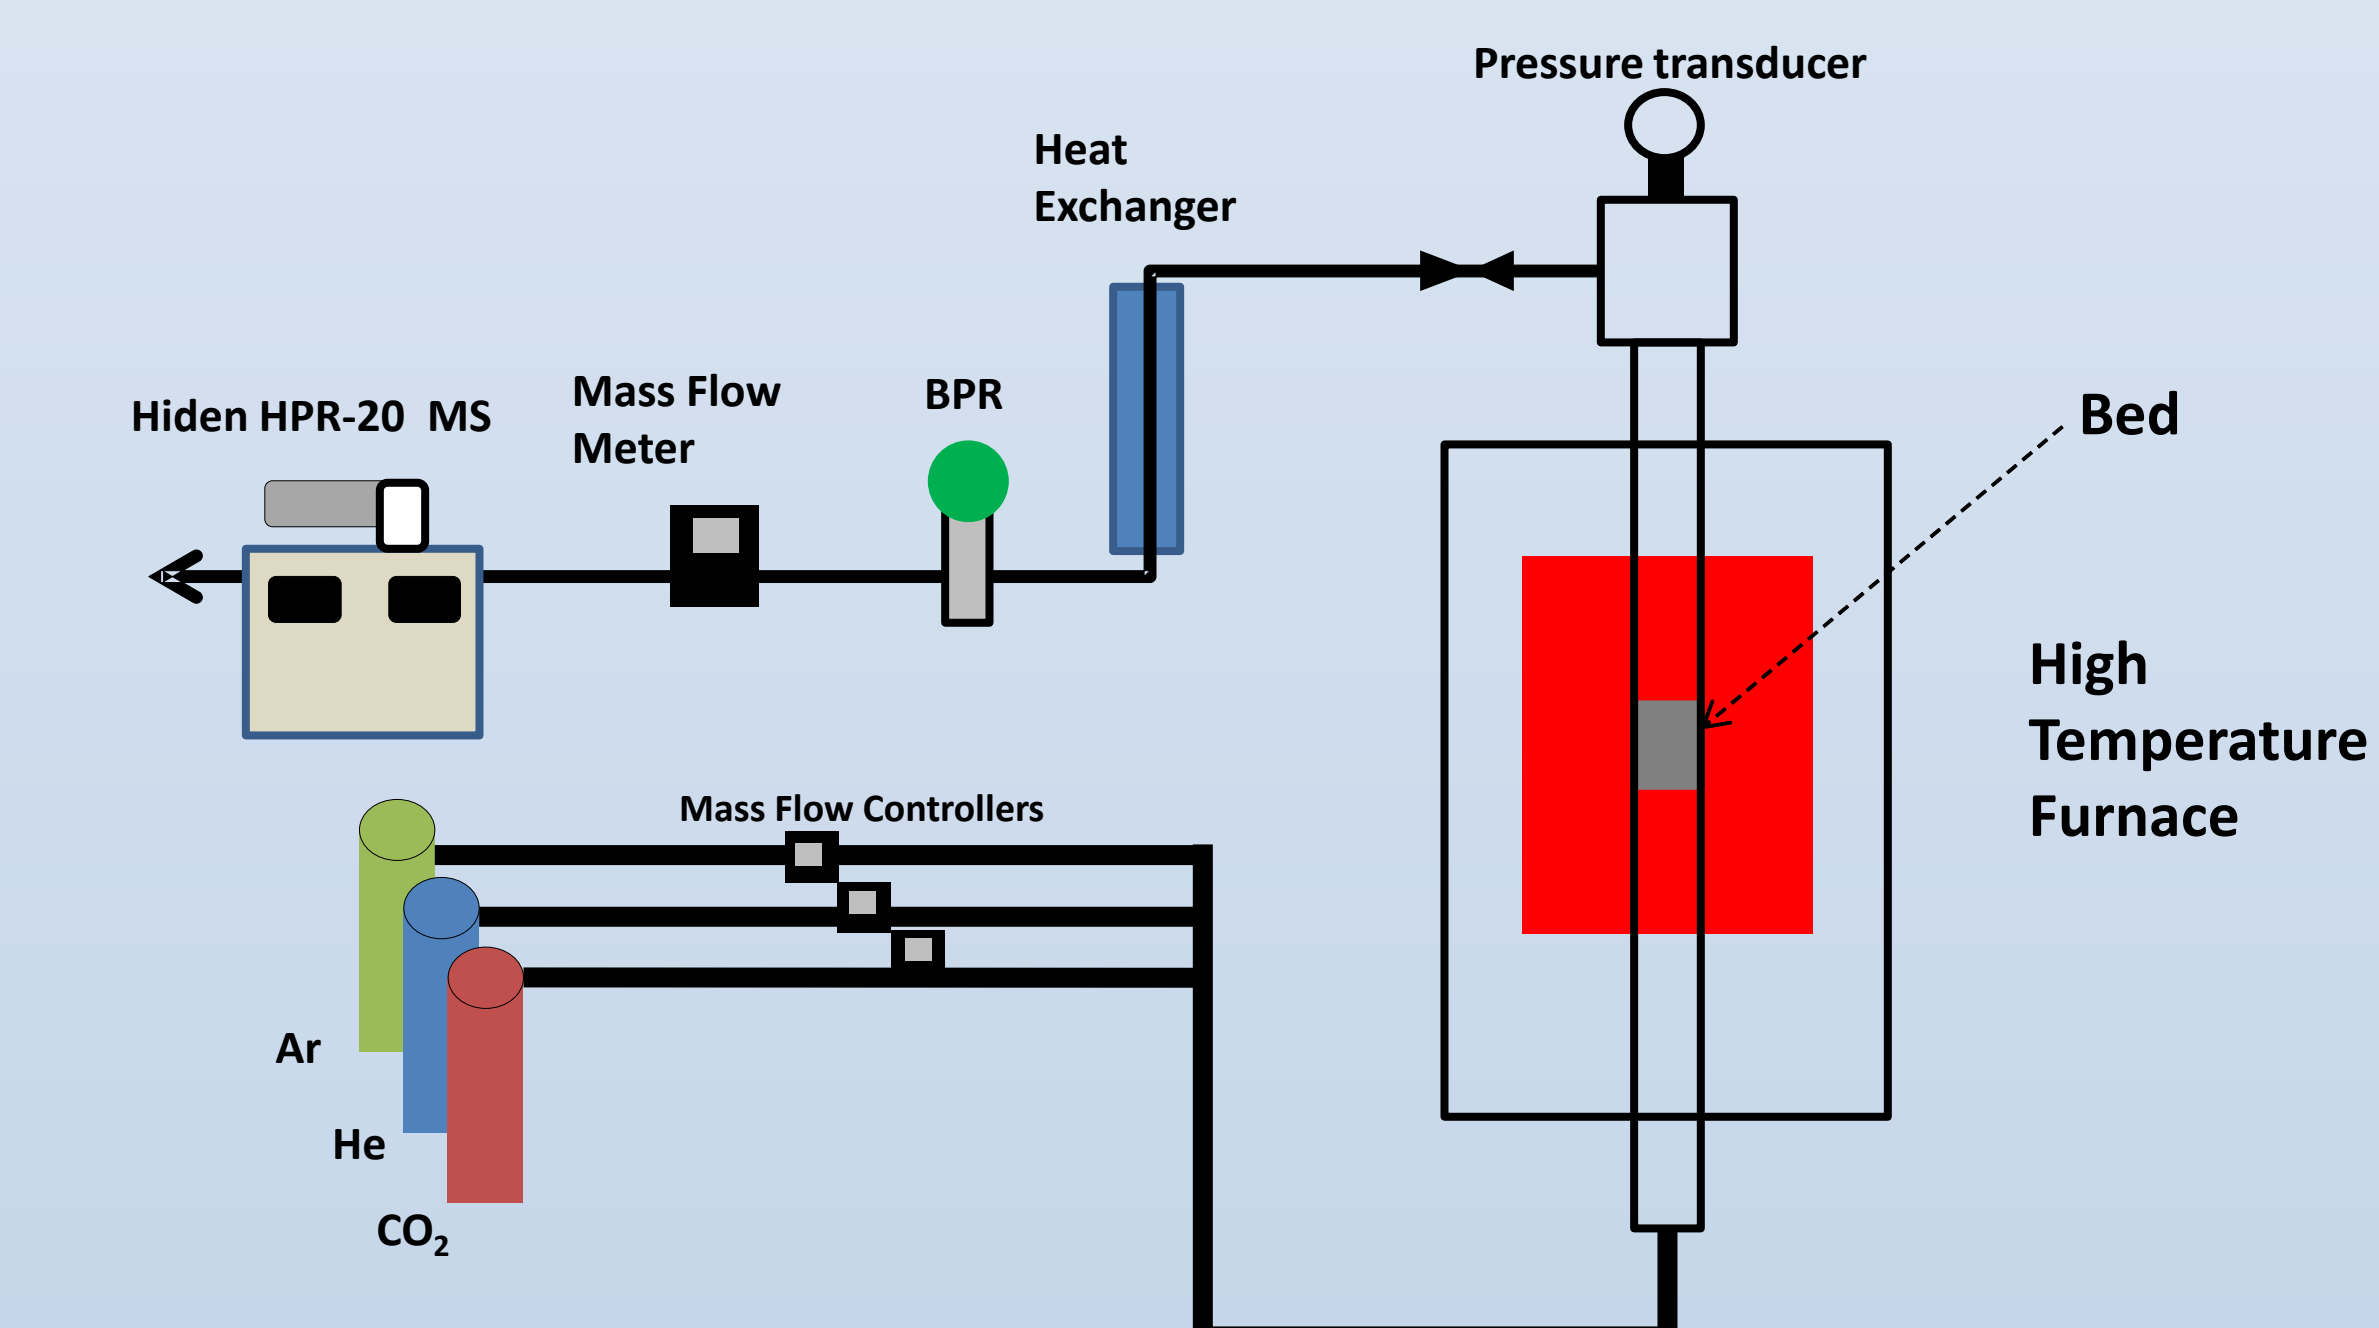


Preliminary data showing dynamic cycling between 1100 and 1300°C at 10°C/min. pCO₂ = 0.33 bar

Z-value of the Parameters

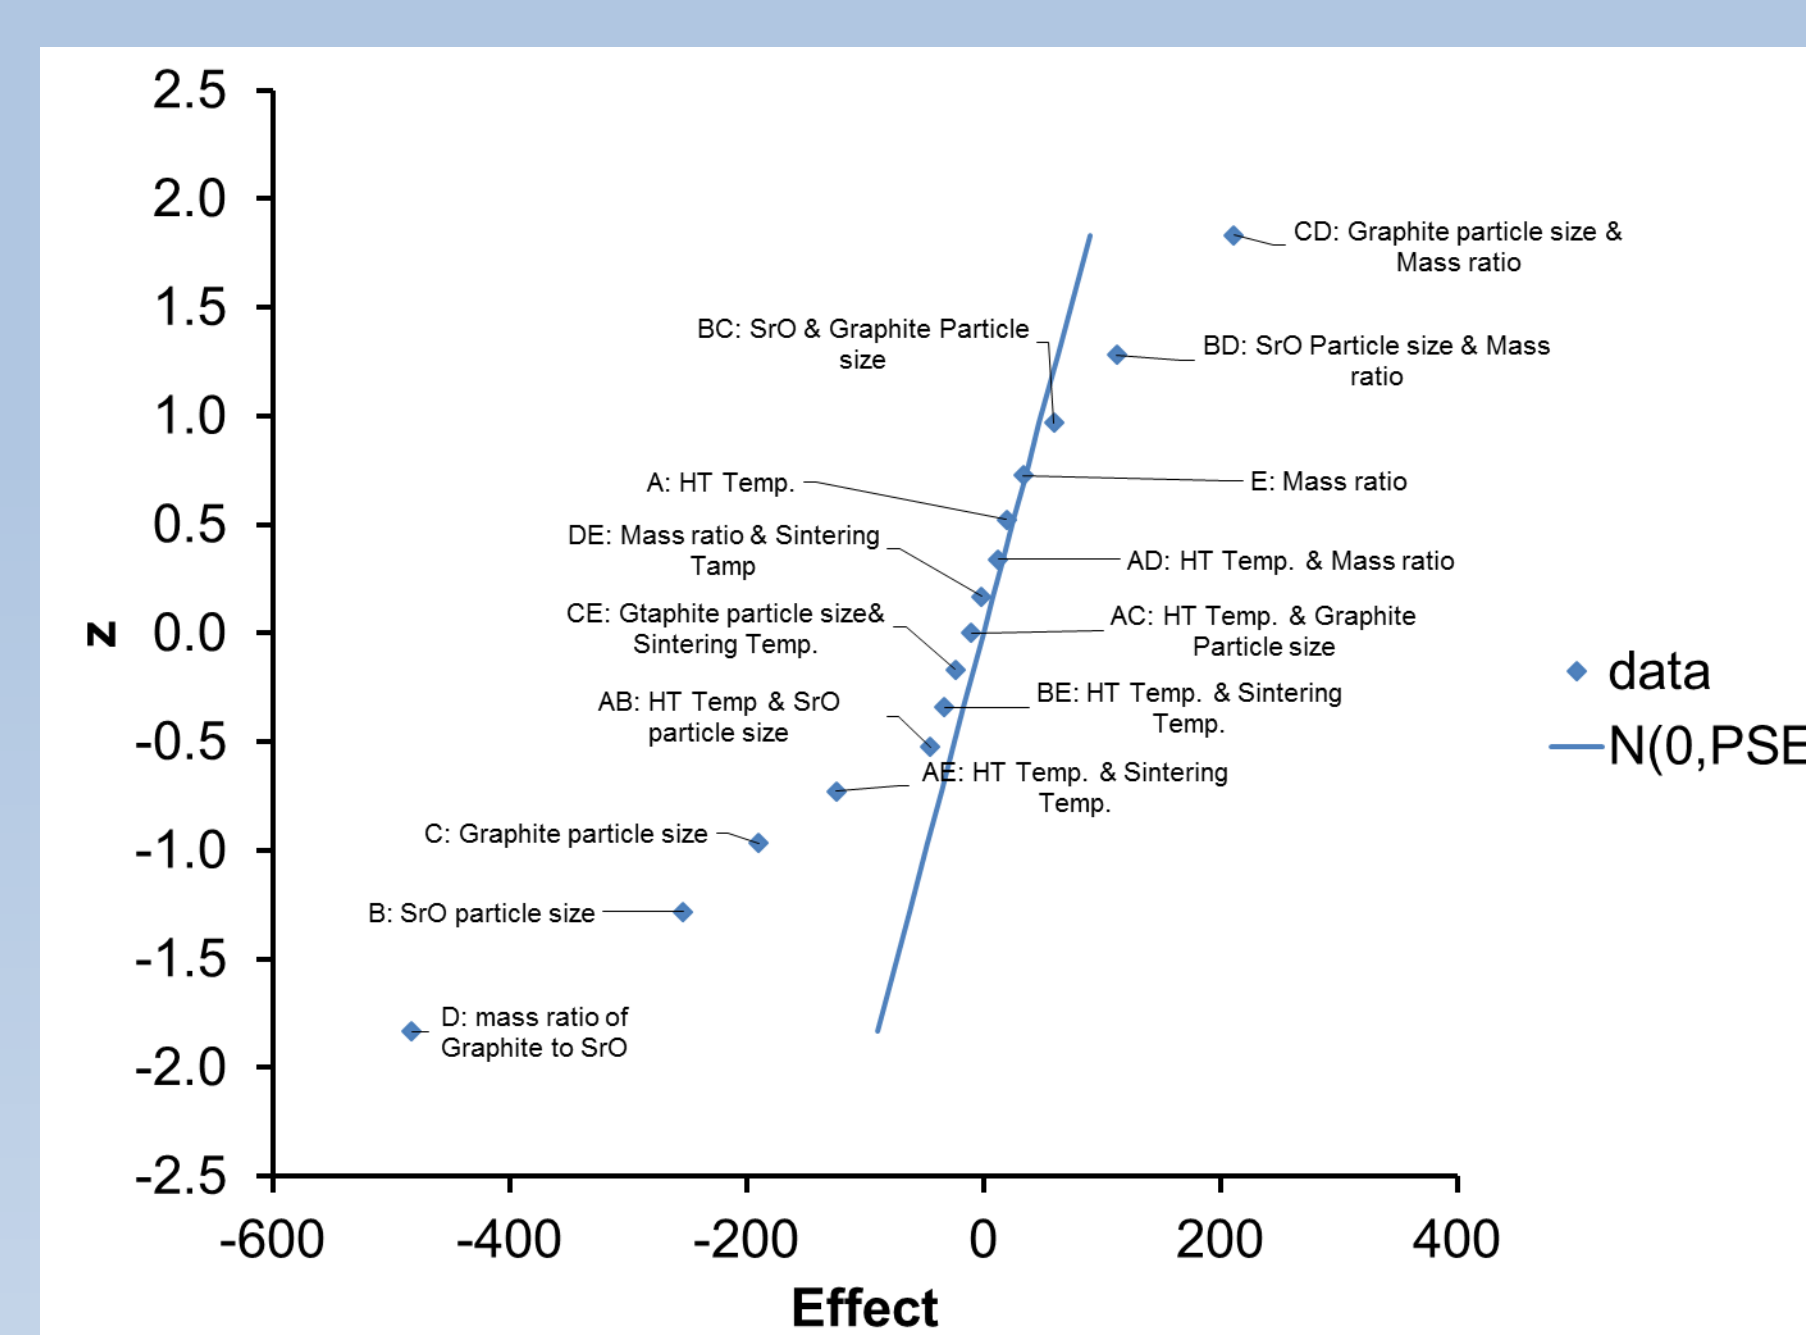

Correlation of results: Lenth's Method

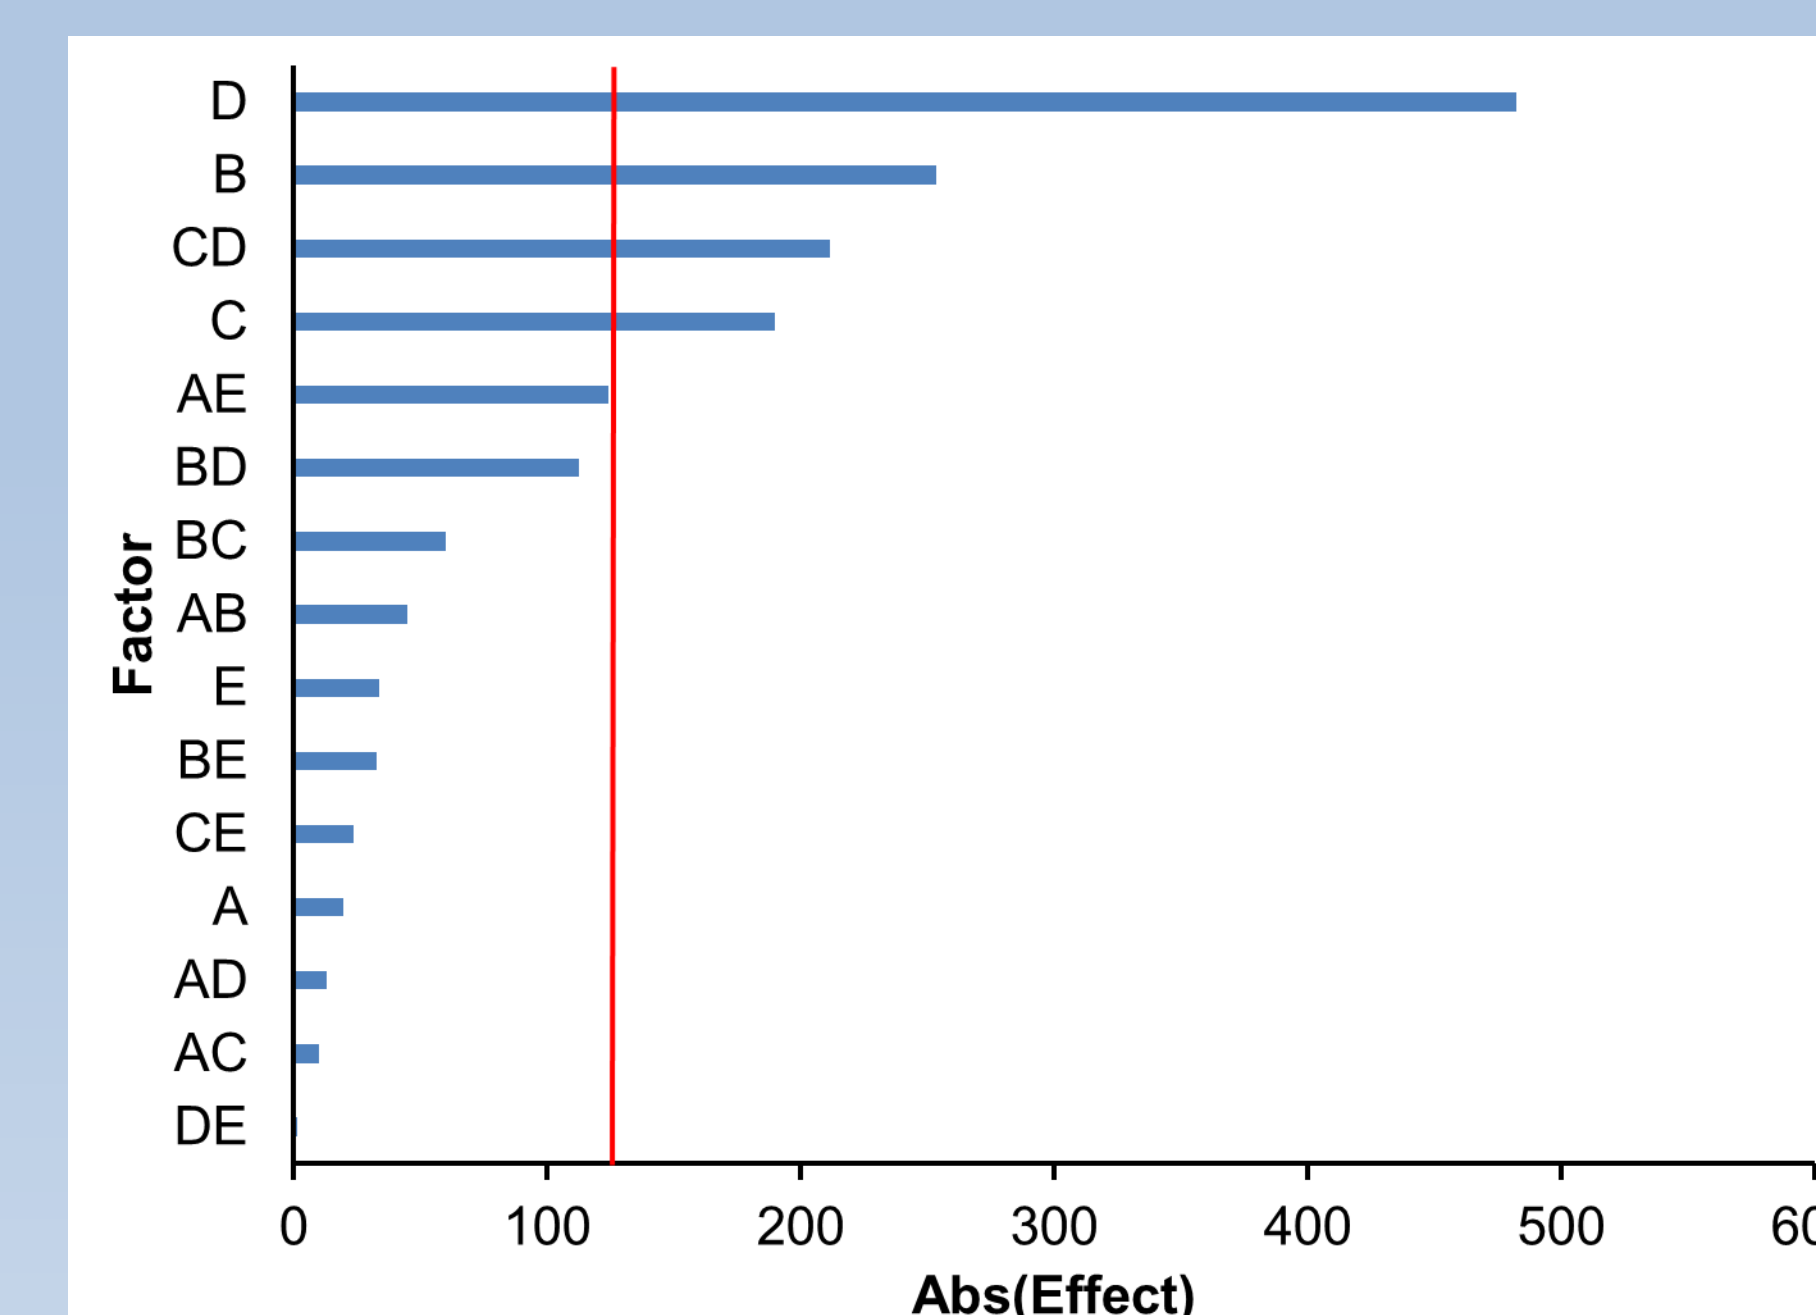

*A baseline of 95 percent.



Acknowledgements
We are very appreciative of funding from Hidden Analytical for participation in this poster session.
This work was funded by the U.S. Department of Energy Sunshot Initiative as part of the ELEMENTS program, award DE-EE0006534.